**10GB-C03-SFPP-AO**
ENTERASYS, 10GBASE-CU SFP+
TWINAX 3M PASSIVE

addon
MEDIA CONVERTERS - MEMORY UPGRADES
BATTERIES - NETWORKING TRANSCEIVERS

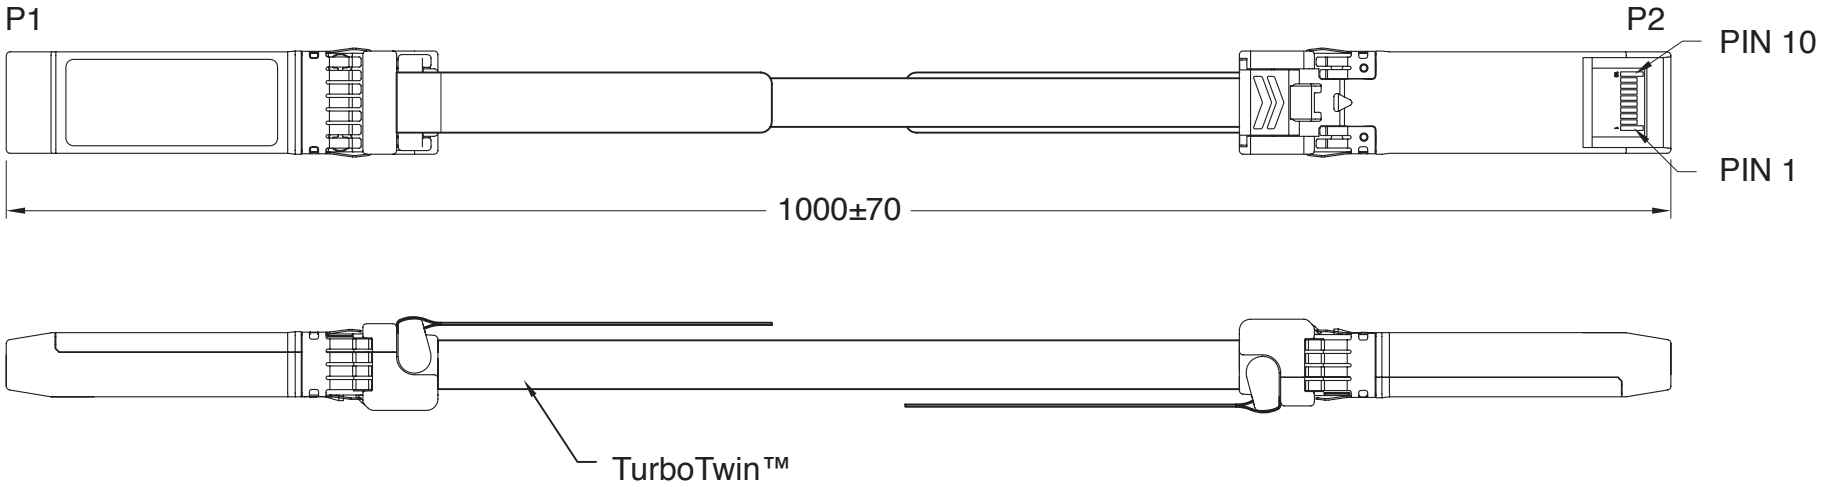


1. CABLE:
   - Conductor: 24AWG solid silver plated copper.
   - Insulation: Foam polyolefin.
   - Pair: 2 singles laid flat and parallel.
   - Pair Drain Wire: 26AWG solid silver plated copper.
   - Pair Shield: Aluminum/Polyster tape. Aluminum side facing in, 25% overlap. Color: Yellow.
   - Inner Shield: Aluminum/Polyester type. Aluminum side facing out, 25% overlap.
   - Outer Shield: 36AWG tin plated copper braid, 85% coverage.
   - Diameter: 6.86mm nominal. Color: Black.
   - Print Legend: “Type CL2 75° 24AWG (UL) Madison Cable CSA AWM II A/B 75C 30B FT4 TurboTwin™ 10G RoHS Compliant”
   - Differential Impedance: 100±5 OHMS @ TDR
   - UL Listing: Type CL2 as specified in articale 725 of the National Electrical Code. TurboTwin™
2. HOOD: Xinc die Casting, Nickel Plating.
3. LATCH: PC Resin UL94V, Color: Black.
4. P.C.B.: 4 Layers, FR4. 30U” Cold on Golden Fingers.

| WIRING CHART | | | |
|---|---|---|---|
| P1 END | | P2 END | |
| P1 PAD | SIGNAL | P2 PAD | SIGNAL |
| 12 | RX- | 19 | TX- |
| 13 | RX+ | 18 | TX+ |
| GROUND | | GROUND | |
| 18 | TX+ | 13 | RX+ |
| 19 | TX- | 12 | RX- |
| GROUND | | GROUND | |